




ROUND CONCRETE PIPE - FLARED ENDS

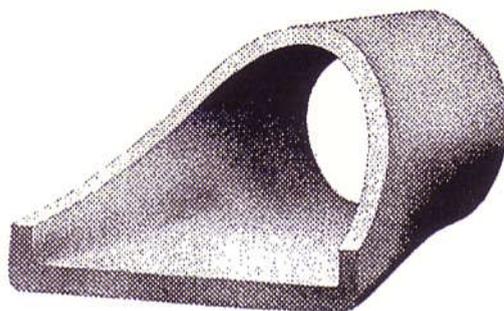

PIPE SIZE	LENGTH PER SECTION	WIDTH	WEIGHT PER SECTION
12"	6'-0"	2'-8"	700#
15"	6'-1"	2'-10 $\frac{1}{2}$ "	900#
18"	6'-1"	3'-5"	1,080#
24"	6'-1 $\frac{1}{2}$ "	4'-6"	1,640#
30"	6'-1 $\frac{3}{4}$ "	5'-7"	2,340#
36"	8'-1 $\frac{3}{4}$ "	6'-8"	4,520#
42"	8'-2"	7'-3"	5,760#
48"	8'-2"	7'-10"	6,980#
54"	8'-4"	8'-4"	8,480#
60"	8'-3"	8'-10"	10,575#
72"	8'-3"	10'-0"	14,800#

Concrete pipe flared ends increase the carrying capacity of the culvert by reducing the entrance loss.

The sloping wing walls improve the appearance of the road and offer no hindrance to mowing machines.

Made to specifications of the Department of Roads, State Of Nebraska.